

Official Pinewood Derby Rules 2025

Key Rules to Keep In Mind:

- Official Class cars must be built new for this season and cannot have been raced in previous years (see section 1a)
- Use an official BSA Pinewood Derby kit, not a PineCar or other kit (see section 2a and 2b)
- Car must weigh no more than 5.0 ounces or 141.7 grams as weighed on the official scale (see section 4a)
- Car must have a wheelbase of between 4" and 4-1/2" (see section 3h)
- Wheel treads must NOT be modified in any way (see section 4j)

1. General



- a. Each car entered in the race must be newly built for the current Cub Scouting year. Cars from previous scouting years are not permitted.
- b. The car should be substantially built by the Cub Scout. Parental supervision and guidance in the construction of the car is encouraged, but the parent **SHOULD NOT BUILD THE CAR FOR THE CUB SCOUT**.

2. Only Official BSA Pinewood Derby Kits Permitted

- a. The body of the car must use the block of wood provided in an official B.S.A. Pinewood Derby Grand Prix kit as its basis.
- b. Old style vintage kits with tall skinny wheels are not permitted in "Official Class" races, nor are "PineCar" or other non-official kits.
- c. The axles must be attached directly to the original block of wood (see below for axle slot rules).

3. Dimensions and Weight


- a. The total weight of the car may not exceed 5 ounces (141.7 grams). Most digital scales are fairly accurate, but only the official scale will be used for the official weigh-in.
- b. The maximum width of the car, including wheels, may not exceed 2-3/4 inches.
- c. The maximum length of the car may not exceed 7 inches, but there is no minimum except that the wheelbase must be at least 4-1/2".
- d. The minimum ground clearance from the bottom of the wheels to the bottom of the lowest part of the car other than the wheels must be at least 3/8 of an inch, including weights and accessories.
- e. Minimum width between wheels is 1-3/4 inches.
- f. The maximum height of the car is 3-1/2 inches including accessories.
- g. Other materials such as wood, plastic or metal may be added to the original block of wood from the official kit as long as the car is within the allowed dimensions.
- h. If an axle slot is not straight, is broken, defective, or otherwise not usable as determined by the car builder, a new slot or hole may be cut or drilled. **The new hole or slots must be spaced apart (or have a wheelbase of) exactly 4-5/16" (4.3125"), but may be between 4" and 4-1/2". Note that too long or too short of a wheelbase is a common cause for car disqualification, so please pay particular attention to this rule.** It is acceptable to true the original slots or cut or drill the new slots or holes. If you drill new holes, you should use a saw to cut a slot so that the entire length of the axles can be inspected.

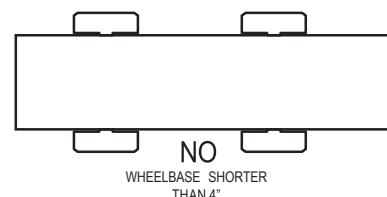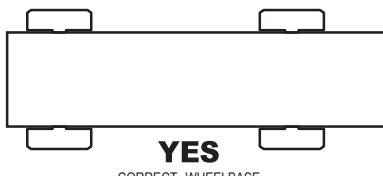

- i. Cars must be powered by gravity only! This means no engines, rubber bands, wind up motors, springs as used for propulsion, rocket motors, CO2 cartridges, thermo-nuclear reactors, plasma boosters, rodents on hamster wheels, or any other thrust generation or enhancement devices.
- j. Projectiles are not allowed. No part of the car may intentionally detach from the car during the race, come into contact with any other car, or extend outside the allowed dimensions at any time.
- k. Movable or liquid weights that shift the center of gravity of the car when the car is tipped or rolled are not allowed.
- l. Electronics are allowed as long as they do not provide any propulsion. Examples of acceptable electronics include LEDs, phototransistors, microprocessors, batteries, electromagnetic coils, transistors, relays, transmitters to cause lights or effects, etc. Use electronics to enhance performance or just to make your car look cool. However, you may not use the electronics to create any kind of propulsion or inertial force.

4. Wheels and Axles

- a. The original wheel axles (nails) should be placed in the original slots provided in the block of wood in the official kit, if possible (see axle slot rules above under 3h).
- b. The car may not be designed so that the wheels ride upon the center guide strip of the track.
- c. Loose pieces that are designed to intentionally fall off during a race are not permitted.
- d. If the front of the car is designed to gain an unfair advantage by shortening the distance between the start pin and the finish line sensor, or the car design otherwise interferes with a fair start, race officials reserve the right to require the racer to modify the front of the car to eliminate the advantage, or the car will be disqualified.
- e. The axles of the car must be from an official B.S.A. Pinewood Derby kit or an official Pinewood Derby wheel replacement kit.
- f. Axles must be firmly attached to the car and may not pivot in the body.
- g. Axles may be polished, but may not be machined, reduced in diameter more than 1% of their original diameter, or plated or permanently coated with any finish. The heads on the axles may not be modified or reduced except to remove flashing or to polish. Reshaping, tapering, grooving, or otherwise modifying the axles will disqualify the car. No "PineCar" axles will be accepted.
- h. The use of a flexible or sprung suspension system of any type is prohibited.
- i. The wheels must be from the official B.S.A. Pinewood Derby kit or official Pinewood Derby wheel replacement kit. 12-spoke or 14-spoke wheels marked "OFFICIAL BSA MADE IN USA" are permitted), including official factory-colored plastic wheels. No "PineCar" wheels are allowed. Wheels made after January 2009 are preferred because of the smooth tread that requires no sanding. It is acceptable to use wheels with matching mold numbers from different sets of official Pinewood Derby wheel replacement kits.
- j. Wheel treads **may not be altered in any way** other than removal of defects and polishing (see illustration below). Injection molding defects on wheel treads may be removed by sanding VERY lightly. However, the wheels that have been supplied in the official BSA kits since January 2009 DO NOT REQUIRE SANDING AT ALL because the treads are molded without injection molding pin channels. The wheels may be VERY LIGHTLY sanded, polished, or finished with graphite to enhance smoothness, but they may not reshaped or reformed or rounded off in any way. If excessive sanding or finishing including lathe turning is detected by **the presence of turning marks or the slightest rounded-off corners or removal of the tiny bumps at the outside corner of the tread** or any other alteration from the appearance of the stock official BSA wheels, the car will be disqualified. Please be warned: DO NOT RESHAPE THE TREAD OF THE WHEELS IN ANY WAY OR YOUR CAR WILL BE DISQUALIFIED. Below are acceptable and unacceptable wheel profiles:

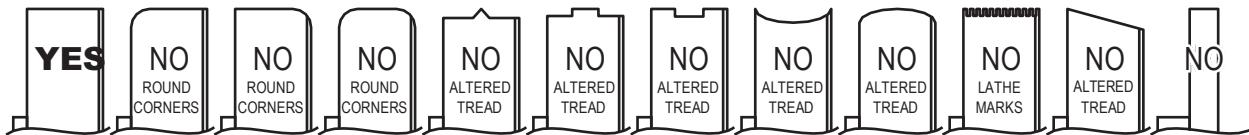

- k. If commercial aftermarket wheels or axles that have been professionally polished, rounded, grooved, lightened, lathed, machined, trimmed, or shaved are detected, the car will be disqualified. You are expected to prepare the wheels and axles yourself.
- l. The bore of the wheels may be reamed, coned, and polished, but not otherwise altered. This is not required on wheels made in or after January 2009 because the treads are very near perfect when they come out of the seamless mold.
- m. No cars will be accepted into the race where bearings, washers, spacers, or any materials other than dry lubricant or paint are placed between the axle/body assembly and the wheel or are used as part of the wheel assembly.

n. Hubcaps or coverings that conceal the axle end and/or contain a reservoir of lubricant are prohibited.

5. Lubrication


- a. Only dry lubricant including graphite powder, Teflon powder, or others, may be used to lubricate wheels. Non-dry lubricants including those with a petroleum, solvent, or non-dry base may attack the plastic wheels and keep them from turning freely, or can damage or contaminate the track, and are not permitted under any circumstances. Do not use oil or grease as a lubricant.
- b. Wheels and axles should be lubricated if desired before being inspected and checked in. Race organizers may or may not provide graphite powder lubricant at the race or at check-in or registration dates.
- c. Once the car is impounded after the inspection and weigh-in, it may NOT be re-lubricated except when the wheel is damaged or becomes dislodged during a race (see below). This includes on race day when the cars are impounded – you will NOT have a chance to put more dry lubricant on your car's wheels on race day.
- d. Dry lubricant must be applied over a trashcan or rag, and spills must be completely cleaned up.
- e. Lubricant reservoirs that are built into the car are prohibited.

6. Build Techniques Not Specified

- a. Other than the prohibitions and limitations described in this document, **it is acceptable** for the car to employ any other "tricks" such as making the car ride on 3 wheels, favoring front, mid or rear weighting, streamlining, or any other techniques that the builder feels will make the car faster.
- b. The race officials may disqualify any car that in their determination is not in compliance with the spirit of these race rules. You are a Cub Scout, so Honesty is up to you.
- c. In rare circumstances, race officials reserve the right to perform a destructive teardown inspection of wheels, axles, or other systems on any car entered. Any such inspections will be performed after all races have been completed, and should a car fail the inspection, the final race results will be adjusted. Race officials will return all parts to the participant, but will not be responsible for restoring the car. Please note that a teardown inspection may affect the ability for the car to compete in the District Pinewood Derby.

OPERATIONAL RULES FOR COMPETITION

1. The Track

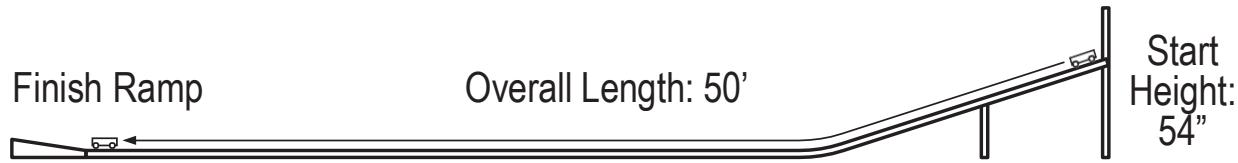

- a. The racetrack used in the Pinewood Derby is built to the dimensions (except the length) specified in the latest copy of the Cub Scout Leader's How To Book (Cat. No. P3831A).
- b. The racetrack to be used is a 6-lane all-aluminum track and is 50 feet in length (this is longer than most tracks because of the higher speed reached by the cars on the smoother aluminum racing surface).
- c. The incline from the start line to the level section of the track is approximately 30 degrees, and the cars start at approximately 54" above the ground.
- d. The surface and guide rails of the track are smooth aluminum and are cleaned prior to the race.
- e. The track is equipped with an electronic starting gate and electronic finish line timer system. Software is used to determine exact heat timing for each car down to five decimal points of a second and the heat and overall finish order.
- f. The start line mechanism is comprised of vertical pins that are centered within each lane, and when activated for the start of the race, fall forward so quickly that no car will come into contact once the pins snap down.
- g. The finish line detector is comprised of red light beams centered within each lane at the finish line of the track pointing up into light sensors on the underside of the finish line overhead structure. The distance from the starting pin and the finish line beam is identical on each lane.
- h. The track will be adjusted to be as level as possible across the width over the entire track length.
- i. Joints between sections of the track will be adjusted to provide a smooth transition by the car.
- j. Every attempt shall be made to insure that all running lanes of the track are equal, but each car runs at least once on each lane to make sure that all effects of any minor differences in the lanes is averaged out.
- k. Race standings and results are displayed on a video projector and screen for all participants and spectators to see.
- l. Race officials will strive to make the race as absolutely fair as possible.

2. Race Procedure

- a. You are responsible for knowing when your car must be registered. For the District Finals race, your Cub Scout Pack leaders are responsible for finding out when and where to check in the impounded eight fastest cars from your pack, and paying any registration fees.
- b. Only currently registered Cub Scouts may enter cars.
- c. Cub Scouts should be dressed in a neat, clean, Class A uniform at the race event. However, a Cub Scout will not be disqualified from racing if he is not wearing his uniform.
- d. All spectators must stay back from the track and not crowd the barricades. Spectators must **NEVER STEP OVER THE TRACK** for any reason...WALK AROUND THE TRACK instead!
- e. Spectators must keep all food and beverages far away from the track.
- f. Race officials will establish and announce the registration deadline time for the race. No registrations will be accepted after the deadline. Scouts in line for registration before the deadline will be accepted. Any Scout or other participant who shows up after registration has closed will NOT BE ABLE TO RACE. If you have a scheduling conflict, every effort will be made to accommodate you so you and your Cub Scout can participate in the race.
- g. After the Scout has registered, his car will be weighed, measured, and inspected to ensure compliance with the official rules.
- h. Only an officially designated scale will be used to weigh cars. Cars will not be accepted if their weight exceeds five (5) ounces by even the smallest resolution of the balance. Scales vary widely, so be prepared to adjust weight of your car up or down at the time of inspection. Race officials will have an official BSA regulation 5 ounce reference weight on hand to calibrate and verify the official scale.

- i. A wood, plastic, or metal jig will be used to determine if the car complies with the dimension limitations (length, width, height, wheelbase, and ground clearance).
- j. A Cub Scout whose car fails any part of the inspection will be given the opportunity to make adjustments to the car. Cars will be re-weighed, measured, and inspected until they comply or until the scheduled race starting time. If you are unable to make your car comply with the inspection requirements before the start of the race, your car will not be allowed to run.
- k. After the car has passed inspection, it will be impounded and taken by a race official to the staging area to await the race. Cars may not be handled by the owner after inspection until after all racing has been completed.
- l. Cars will be handled only by the race officials, with the exception of placing the car in its lane—which will be done by the Cub Scout (the car owner may also perform emergency repairs as needed).
- m. No additional lubrication may be applied to the car after passing inspection or during the race, so be sure to apply lubrication to your wheels and axles before submitting your car for inspection.
- n. Bye runs may be used when there is no opponent because of an uneven number of Scouts participating. A bye run is defined as a race with no opponent. Bye runs will be kept to a minimum as calculated by the race management software.
- o. Each heat will begin with Cub Scouts positioning their cars on the track.
- p. Each car will run at least once in each of the six lanes in a random schedule. If your car number doesn't come up for a while, rest assured it will eventually run.
- q. Race officials will return the cars from the finish line to the staging area between races. Spectators should not touch the cars at any time during the race.
- r. In the event of a breakdown of a car during the race, the participant will be allowed to repair the car. Only the damaged portion of the car may be modified. The Scout must do the work with assistance from his parent or guardian. Race officials shall re-inspect any car that is serviced during the race. The Race officials may choose to continue with other race heats in order to avoid long delays in the race.
- s. In the event of a breakdown of the track, electronic finishing or ordering system, or race management software, or in the event of an error in set up of the cars (car jumps from the lane, car positioned in wrong lane, car positioned backwards in the lane, etc.), the heat affected by the breakdown may be re-run and the original result, if any, will not be factored into the final results.
- t. Each car will run one time in each of the six lanes. Each car's time from each heat is added together by the race software, and the car with the lowest combined time is the winning car. All cars are ranked for standings by their combined times.
- u. There are no elimination rounds or heats. Every car runs once in each lane.
- v. If a participant needs to leave the race before all heats have been completed, the participant must leave the car in the care of the race officials. The car will be returned to the participant after the race or by arrangement.
- w. The top fastest five (5) cars from each Cub Scout pack will be eligible to move on to the District Finals race.
- x. If any owner of one of the top 5 cars does not wish to have his car impounded, then the Pinewood Derby official for the pack may offer the slot to the next fastest car.

Additional Pinewood Derby Rules:

A few additional notes:

- Attaching weight to the car shouldn't be on the underside - the ground clearance of the kit is needed to fit on the track.
- If the front edge of the car doesn't hold against the starting pin properly, the car will have to be run backwards. Keep a front edge on the car please
- Recommendation: trace the block of wood onto paper and have your scout draw their design out before you cut.
- Should an accident occur, there are spare kits available (cost of a kit is ~\$5)
- Remember! Your scout should take the lead on the design and assembly of their Derby car. It is a great source of pride for these scouts. Due to safety, it is understood that some assistance with larger cuts/etc will be needed. Older scouts (AOL, Webelos, Bears) should be able to do a substantial amount of work by themselves with supervision. Younger scouts may need more assistance, but please let their opinions and voice drive the decisions, even if it isn't what we might do. And, have fun.